

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
14 April 2005 (14.04.2005)

PCT

(10) International Publication Number
WO 2005/033428 A2

(51) International Patent Classification⁷: **E04B**
(21) International Application Number:
PCT/US2004/031961
(22) International Filing Date:
29 September 2004 (29.09.2004)
(25) Filing Language: English
(26) Publication Language: English
(30) Priority Data:
60/506,856 30 September 2003 (30.09.2003) US
60/515,551 30 October 2003 (30.10.2003) US
50/536,835 16 January 2004 (16.01.2004) US

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant and
(72) Inventor: **YOUNG, Kevin, C.** [US/US]; 1105 Ballinger Road, Lutz, FL 33548 (US).
(74) Agent: **AYCOCK, Stephen, W., II**; Miles & Stockbridge P.C., 1751 Pinnacle Drive, Suite 500, McLean, VA 22102 (US).

Published:
— *without international search report and to be republished upon receipt of that report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: TRIM PIECE

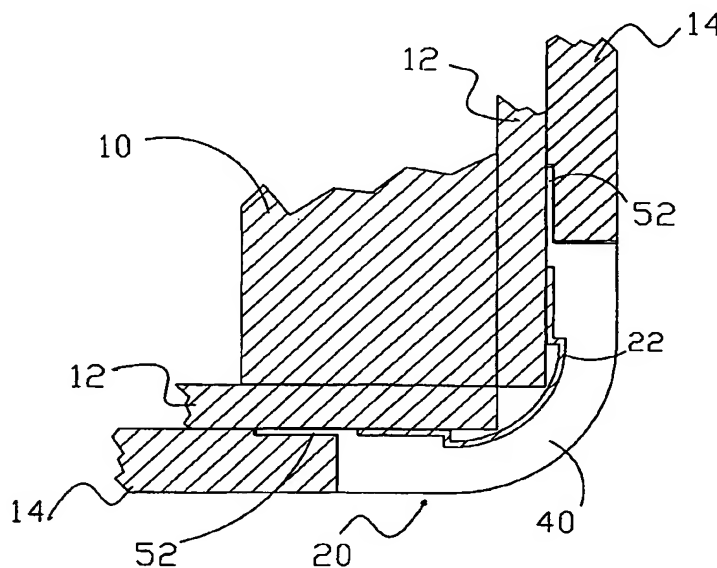

(57) Abstract: A trim piece for installing at a corner, either inside or outside, which has a bullnose corner bead. An exemplary embodiment of the trim piece includes a body that wraps over the convexly curved portion of the bullnose corner bead and at least one flange extending parallel to the edges of the flanges of the corner bead. The two flanges are attached to the trim piece at the two edges respectively. The trim piece has an interior surface matching closely the exterior surface of the corner bead and an exterior surface which is both convexly curved to match the convex bullnose corner bead and molded to match the exterior profile of the trim such that a smooth transition from trim board around the corner to the other trim board results.



WO 2005/033428 A2